



GT30TS00

Advanced

GT30TS00

10-bit Digital

Temperature Sensor



GT30TS00

Table of Contents

| | |
|---|----|
| 2. General Description | 4 |
| 3. Functional Block Diagram | 5 |
| 4. Pin Configuration | 6 |
| 4.1 8-Pin SOIC/SOP and TSSOP | 6 |
| 4.2 8-Lead UDFN | 6 |
| 4.3 Pin Definition | 6 |
| 4.4 Pin Descriptions | 6 |
| 5. I²C / SMBus Serial Interface | 8 |
| 5.1 Serial bus interface | 8 |
| 5.2 I ² C / SMBus Communication | 8 |
| 5.3 Start Condition | 8 |
| 5.4 Stop Condition | 8 |
| 5.5 Acknowledge | 8 |
| 5.6 Slave address | 8 |
| 5.7 Power-Up and Reset States | 8 |
| 6. Temperature Sensor | 12 |
| 6.1 TS Register Overview | 12 |
| 6.2 TS Write Operation | 12 |
| 6.3 TS Read Operation | 12 |
| 6.4 TS Register Set Definition | 12 |
| 6.5 TS Capability Register | 13 |
| 6.6 TS Configuration Register | 14 |
| 6.7 TS Register Value Definitions | 15 |
| 6.8 TS High Limit Register | 16 |
| 6.9 TS Low Limit Register | 16 |
| 6.10 TCRIT Limit Register | 16 |
| 6.11 Temperature Data Register | 16 |
| 6.12 Manufacture ID Register | 17 |
| 6.13 Device ID / Revision Register | 17 |
| 7. Electrical Characteristics | 20 |
| 7.1 Absolute Maximum Ratings | 20 |
| 7.2 Operating Range | 20 |
| 7.3 Capacitance | 20 |
| 7.4 AC Measurement Conditions | 20 |
| 7.5 DC Electrical Characteristic | 21 |
| 7.6 AC Electrical Characteristic | 22 |
| 7.7 Temperature to Digital Conversion Performance | 22 |
| 8. Ordering Information | 23 |
| 9. Package Information | 24 |
| 9.1 SOIC/SOP | 24 |
| 9.2 TSSOP | 25 |
| 9.3 UDFN | 26 |
| 10. Revision History | 27 |



GT30TS00

1. Features

- Supply voltage: 2.2V to 3.6V
- 2-wire serial interface I²C/SMBus compatible
- Low operating current
 - 100 μ A (max) TS in Shutdown mode
 - 1 mA (max) TS being active
- Speed up to 1 MHz in I²C bus (Fast Mode) and 100KHz in SMBus 2.0
- Temperature sensor accuracy:
 - $\pm 0.5^{\circ}\text{C}$ (Typ.) from $+75^{\circ}\text{C}$ to $+95^{\circ}\text{C}$
 - $\pm 1^{\circ}\text{C}$ (Typ.) from $+40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
 - $\pm 2^{\circ}\text{C}$ (Typ.) from -20°C to $+125^{\circ}\text{C}$
- Temperature sensor resolution: $0.25^{\circ}\text{C}/\text{LSB}$
- The TS continuously monitors the temperature and updates the temperature data typically eight times per second. Temperature data is latched internally by the device and may be read by software from the bus host at any time.
- Temperature sampling (ADC conversion) time: 125 msec (max.)
- Hysteresis selectable set points from: 0 , 1.5°C , 3°C & 6°C
- Ambient temperature sensing range: -20°C to $+125^{\circ}\text{C}$



GT30TS00

2. General Description

The GT30TS00 is a Temperature Sensor (TS) product which is fully compatible to industrial standard I²C/SMBus interface. The TS monitors the ambient temperature ranging from -20°C to 125°C. The TS includes a high precision CMOS temperature sensor, a sigma-delta analog to digital converter (ADC) and a serial interface compatible to industrial standard I²C/SMBus. The ADC default resolution is set at 10-bit (0.25°C). The accuracy over various temperature ranges is:

- ±0.5°C (Typ.) for temperature range from +75°C to +95°C
- ±1°C (Typ.) for temperature range from +40°C to +125°
- ±2°C (Typ.) for temperature range from -20°C to 125°C

The TS has shutdown current 100 µA (max.) in Standby mode.


The TS component has user-programmable registers that are used to configure both the TS performance and response to over-temperature conditions. The device contains programmable high, low and critical temperature limits. Finally, the device **EVENT** pin can be configured as active high or active low and can be configured to operate as an interrupt or as a comparator output.

The unique GT30TS00 product operates from 2.2V to 3.6V and is offered SOIC/SOP, TSSOP and UDFN package, which are lead-free, RoHS, halogen free or Green compliance.



GT30TS00

3. Functional Block Diagram

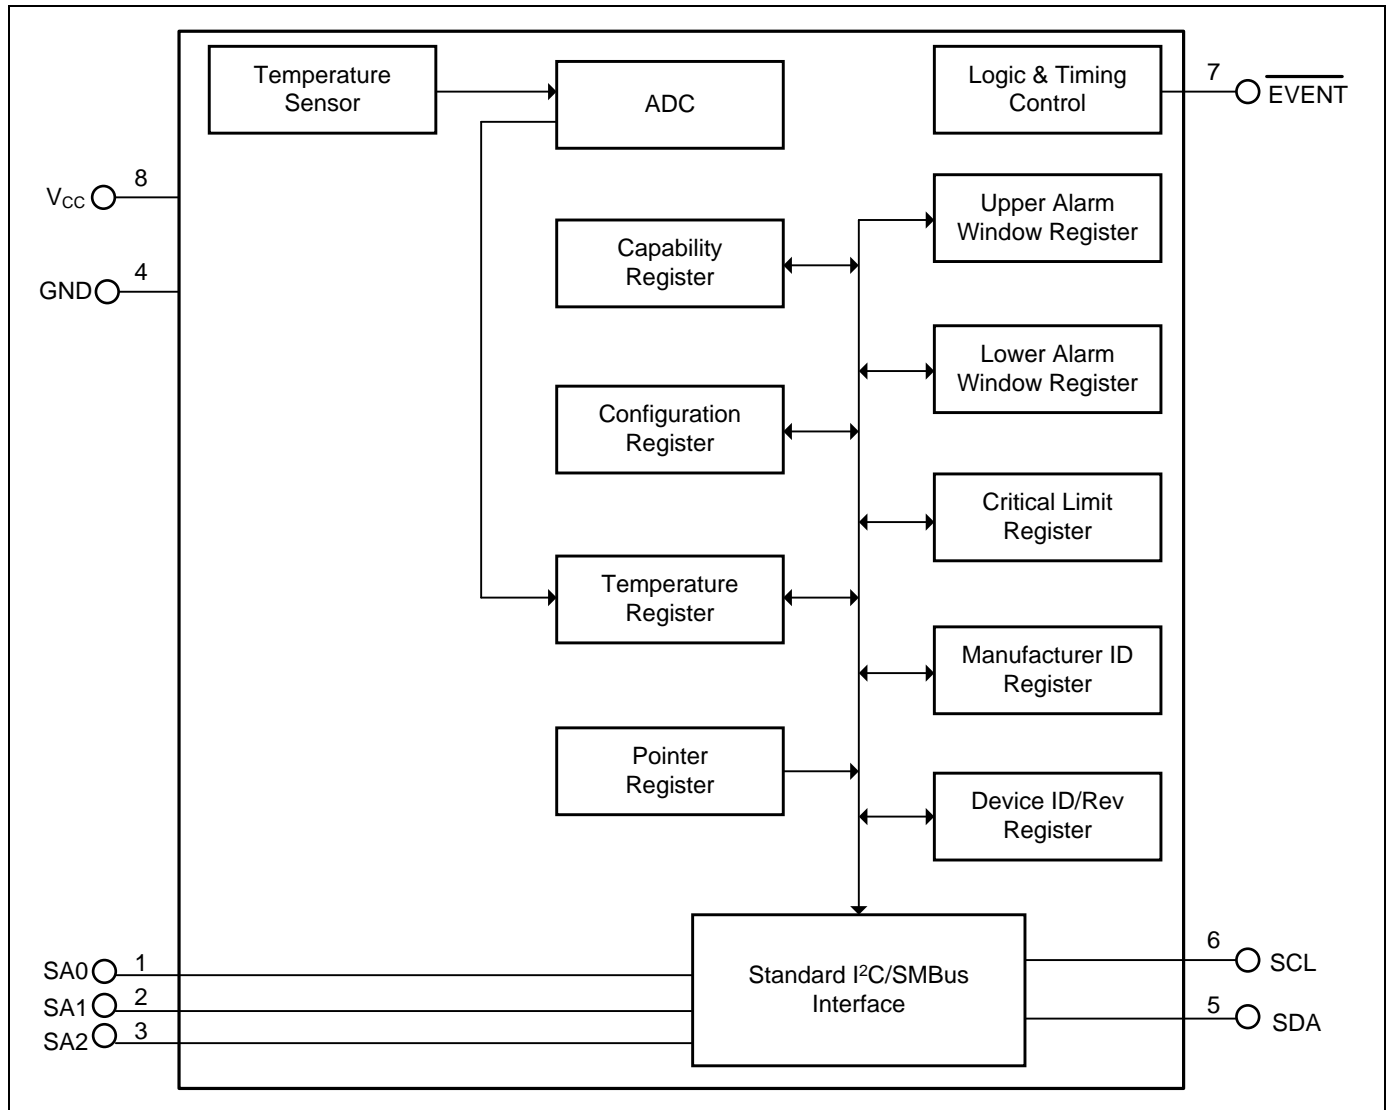





GT30TS00

4. Pin Configuration

4.1 8-Pin SOIC/SOP and TSSOP

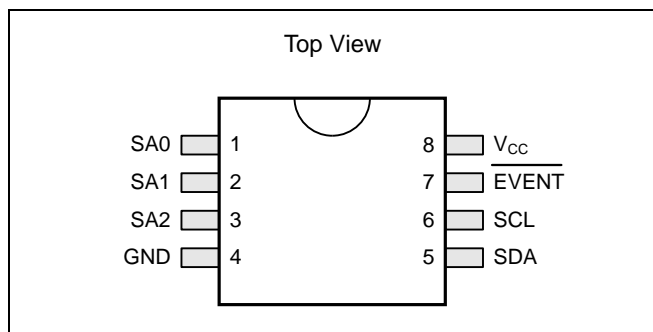

4.2 8-Lead UDFN

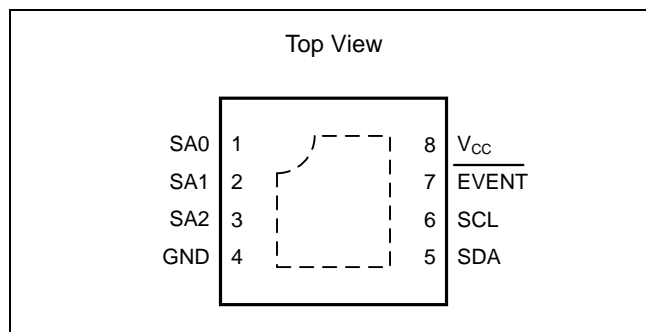

4.3 Pin Definition

| Pin No. | Pin Name | I/O | Definition |
|---------|---------------------------|-----|---|
| 1 | SA0 | I | Device Address Input |
| 2 | SA1 | I | Device Address Input |
| 3 | SA2 | I | Device Address Input |
| 4 | GND | - | Ground |
| 5 | SDA | I/O | Serial Address, Data input and Data output (Open drain) |
| 6 | SCL | I | Serial Clock Input |
| 7 | $\overline{\text{EVENT}}$ | O | Temperature Event Pin |
| 8 | V _{CC} | - | Power Supply |

Note: Thermal sensing devices also have a heat paddle, typically connected to the application ground plane.

4.4 Pin Descriptions

SCL

This input signal is used to strobe all data in and out of the device. In applications where this signal is used by slave devices to synchronize the bus to a slower clock, the bus master must have an open drain output, and a pull-up resistor can be connected from Serial Clock (SCL) to V_{CC}. (Figure 4.1 indicates how the value of the pull-up resistor can be calculated). In most applications, though, this method of synchronization is not employed and so the pull-up resistor is not necessary, provided that the bus master has a push-pull (rather than open drain) output.

SDA

The bi-directional signal is used to transfer data in or out of

the device. It is an open drain output that may be wire-ORed with other open drain or open collector signal on the bus. A pull up resistor must be connected from Serial Data (SDA) to the most positive V_{CC} in the I²C Bus chain. (Figure 4.1 indicates how the value of the pull-up resistor can be calculated).

SA0, SA1, SA2

These input signals are used to create the Logical Serial Address LSA that is compared to the three least significant bits(b3, b2, b1) of the 7-bit Slave Address.(Pls refer to table 5.1 for details on LSA encoding).

$\overline{\text{EVENT}}$

The $\overline{\text{EVENT}}$ pin is an open-drain pin that requires a pull-up



GT30TS00

to V_{CC} on the system motherboard or integrated into the master controller. $\overline{\text{EVENT}}$ has three operating modes, depending on configuration settings and any current out-of-limit conditions. These modes are Interrupt, Comparator, or TCRIT Only.

In Interrupt Mode the $\overline{\text{EVENT}}$ pin will remain asserted until it is released by writing a '1' to the "Clear Event" bit in the Status Register. The value to write is independent of the $\overline{\text{EVENT}}$ polarity bit.

In Comparator Mode the $\overline{\text{EVENT}}$ pin will clear itself when the error condition that caused the pin to be asserted is removed. When the temperature is compared against the TCRIT limit, then this mode is always used.

Finally, in the TCRIT Only Mode the $\overline{\text{EVENT}}$ pin will only be asserted if the measured temperature exceeds the TCRIT Limit. Once the pin has been asserted, it will remain

asserted until the temperature drops below the TCRIT Limit minus the TCRIT hysteresis. Figure 6.5 illustrates the operation of the different modes over time and temperature.

The systems that use the active high mode for $\overline{\text{EVENT}}$ must be wired point to point between the GT30TS00 and the sensing controller. Wire-OR configurations should not be used with active high $\overline{\text{EVENT}}$ since any device pulling the $\overline{\text{EVENT}}$ signal low will mask the other devices on the bus. Also note that the normal state of $\overline{\text{EVENT}}$ in active high mode is a 0 which will constantly draw power through the pull-up resistor.


V_{CC}

Supply voltage.

GND

Ground of supply voltage.

Figure 4.1 Maximum RL Value Versus Bus Capacitance (CBUS) for an I²C Bus

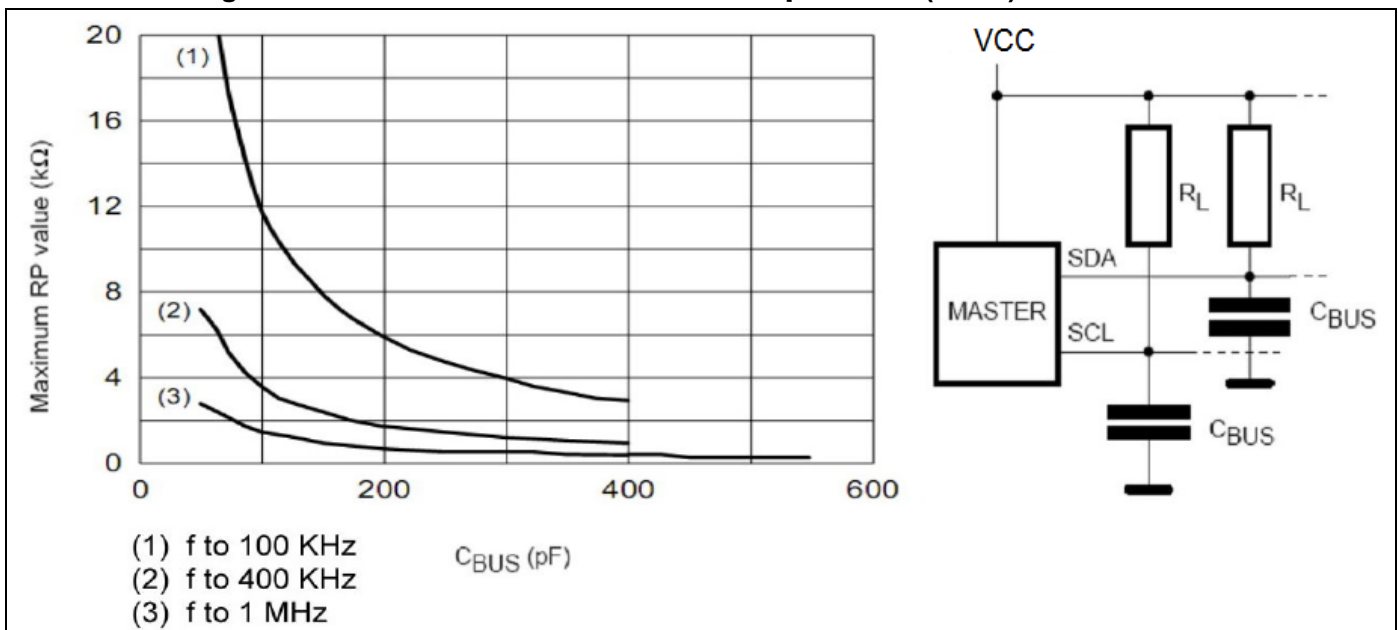



GT30TS00

5. I²C / SMBus Serial Interface

5.1 Serial bus interface

The GT30TS00 behaves as a slave device in the I²C Bus protocol, with all operations synchronized by the serial clock. Read and Write operations are initiated by a START condition, generated by the bus master. The START condition is followed by a Device Select Code and R/ \bar{W} bit (as described in Table 5.1), terminated by an acknowledge bit. GT30TS00 shall not initiate clock stretching, which is an optional I²C Bus feature.

In accordance with the I²C Bus definition, the GT30TS00 use three (3) built-in, 4-bit Device Type Identifier Codes (DTIC) and a 3-bit Select Address to generate an I²C Bus Slave Address.

5.2 I²C / SMBus Communication

The GT30TS00 uses a pointer register to access all registers in the device. Additionally, all data transfers to and from this section of the device are performed as block read/write operations. The data is transmitted/received as 2 bytes, Most Significant Byte (MSB) firstly, and terminated with a NoAck and STOP after the Least Significant byte (LSB). Data and address information is transmitted and received Most Significant Bit first.

5.3 Start Condition

Start is identified by a falling edge of Serial Data (SDA) while Serial Clock (SCL) is stable in the High state. A Start condition must precede any data transfer command. The device continuously monitors (except during a Write cycle) Serial Data (SDA) and Serial Clock (SCL) for a Start condition, and will not respond unless one is given.

5.4 Stop Condition

Stop is identified by a rising edge of Serial Data (SDA) while Serial Clock (SCL) is stable and driven High. A Stop condition terminates communication between the device and the bus master.

5.5 Acknowledge

The acknowledge bit is used to indicate a successful byte transfer. The bus transmitter, whether it is bus master or slave device, releases Serial Data (SDA) after sending eight bits of data. During the 9th clock pulse period, the receiver

pulls Serial Data (SDA) Low to acknowledge the receipt of the eight data bits. The no-acknowledge bit is used to indicate the completion of a block read operation. The bus master releases Serial Data (SDA) after sending eight bits of data, and during the 9th clock pulse period, and does not pull Serial Data (SDA) Low.

5.6 Slave address

To start communication between the bus master and the slave device, the bus master must initiate a Start condition. Following this, the bus master sends the Device Select Code, shown in Table 5.2 (on Serial Data (SDA), most significant bit first). The Device Select Code consists of a 4-bit Device Type Identifier, and a 3-bit Select Address. To access the Temperature Sensor settings is 0011b.

Up to eight devices can be connected on a single I²C Bus. Each one is given a unique 3-bit Logical Serial Address code. The LSA is a decoding of information on the SA pins SA0, SA1, and SA2 as described in Table 5.2. When the Device Select Code is received, the device only responds if the Select Address is the same as the Logical Serial Address.

The 8th bit is the Read/Write bit (R/ \bar{W}). This bit is set to 1 for Read and 0 for Write operations. If a match occurs on the Device Select code, the corresponding device gives an acknowledgment on Serial Data (SDA) during the 9th bit time. If the device does not match the Device Select code, the product deselects itself from the bus, and goes into Standby mode. The I²C Bus operating modes are detailed in Table 5.1.

5.7 Power-Up and Reset States

5.7.1 Power-Up Condition

In order to prevent inadvertent operations during power up, a Power On Reset (POR) circuit is included. On cold power on, V_{CC} must rise monotonically between V_{PON} and V_{CC(min)} without ringback to ensure proper startup. Once V_{CC} has passed the V_{PON} threshold, the device is reset.

Prior to selecting the product and issuing instructions, a valid and stable V_{CC} voltage must be applied, and no



GT30TS00

command may be issued to the device for T_{INIT} . The supply voltage must remain stable and valid until the end of the transmission of the instruction and, for a Write instruction, until the completion of the internal write cycle (T_W).

At power down (phase during which V_{CC} decreases continuously), as soon as V_{CC} drops from the normal

operating voltage below the minimum operating voltage, the device stops responding to commands. On warm power cycling, V_{CC} must remain below V_{POFF} for T_{POFF} , and must meet cold power on reset timing when restoring power.

Table 5.1 I²C Bus Operating Mode

| Mode | R/ \bar{W} Bit | Bytes | Initial Sequence |
|----------|------------------|-------|--|
| TS Write | 0 | 2 | START, Device Select, R/ \bar{W} =0, Pointer, Data, STOP |
| TS Read | 1 | 2 | START, Device Select, R/ \bar{W} =1, Pointer, Data, STOP |

Table 5.2 Device Select Code

| Function | Abbr | Device Type Identifier ^[1] | | | | Select Address ^[2] | | | R/ \bar{W} |
|----------------------------|------|---------------------------------------|----|----|----|-------------------------------|------|------|--------------|
| | | B7 | B6 | B5 | B4 | B3 | B2 | B1 | |
| Read Temperature Register | RTR | 0 | 0 | 1 | 1 | LSA2 | LSA1 | LSA0 | 1 |
| Write Temperature Register | WTR | 0 | 0 | 1 | 1 | LSA2 | LSA1 | LSA0 | 0 |

Note: ^[1] The most significant bit, b7, is sent first.

^[2] Logical Serial Addresses (LSA) are generated by the combination of inputs on the SA pins

Figure 5.1 V_{CC} Ramp Up and Ramp Down


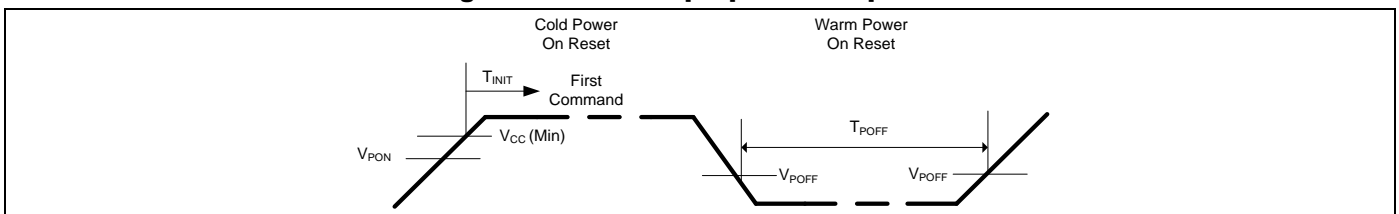


Figure 5.2. Typical System Bus Configuration



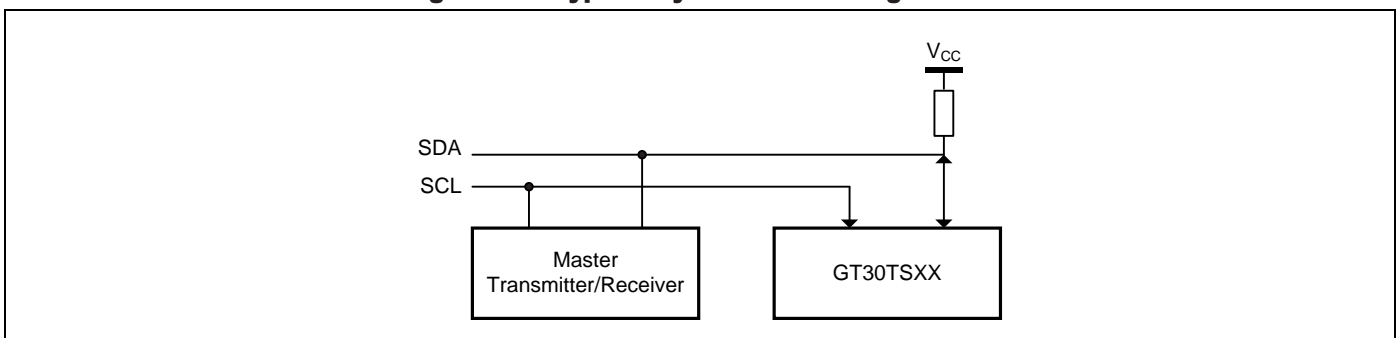

GT30TS00

Figure 5.3. Start and Stop Conditions

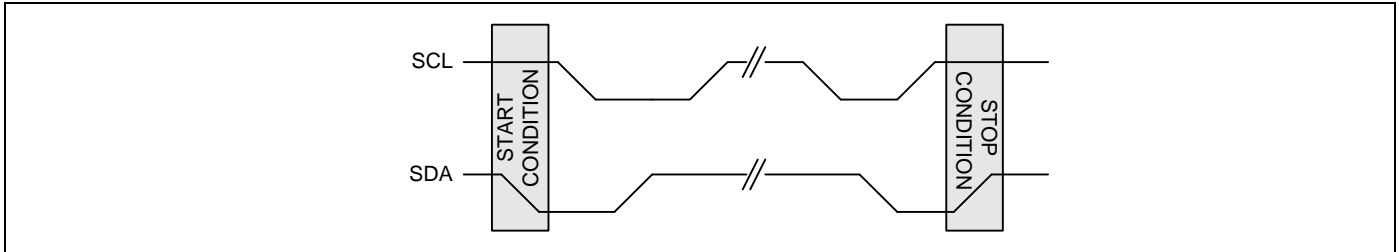


Figure 5.4. Data Validity Protocol

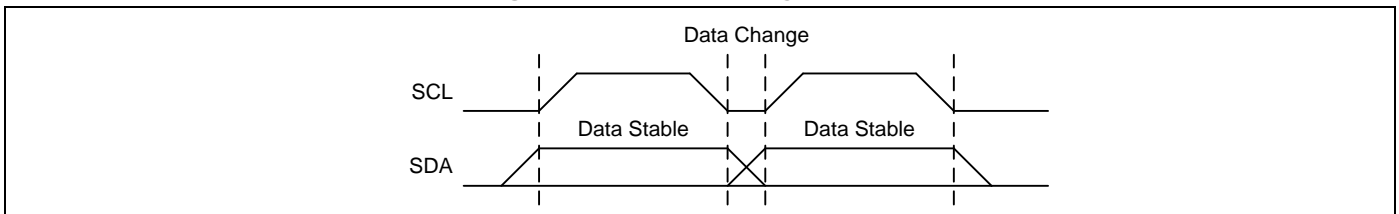


Figure 5.5. Output Acknowledge


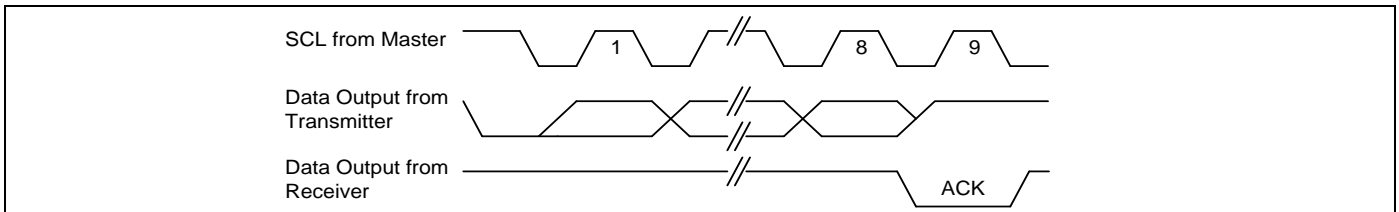



Figure 5.6. Bus Timing



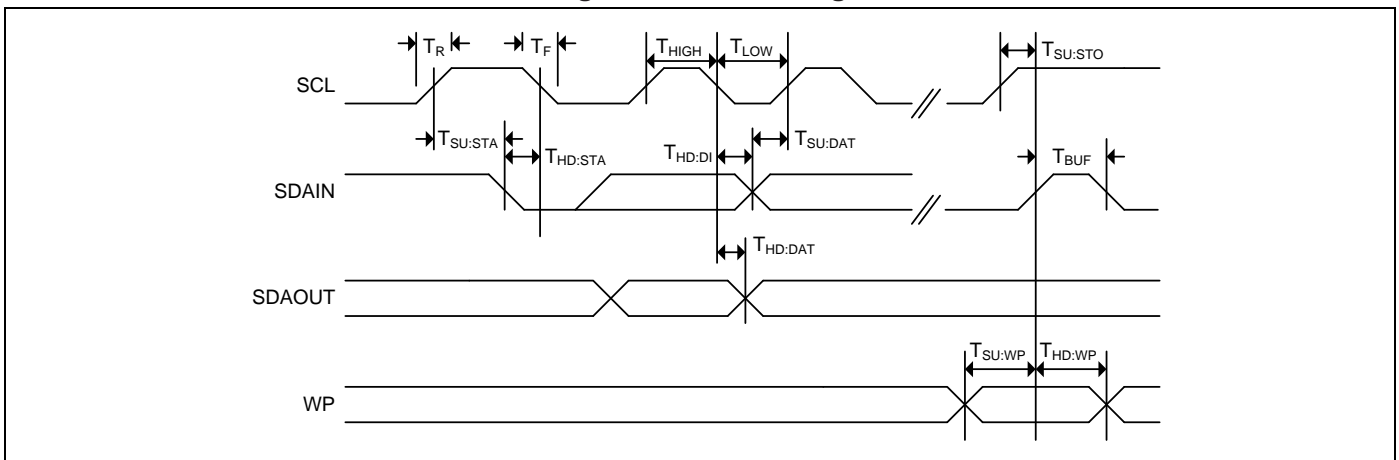

GT30TS00

Figure 5.7. Bus Timeout Waveform

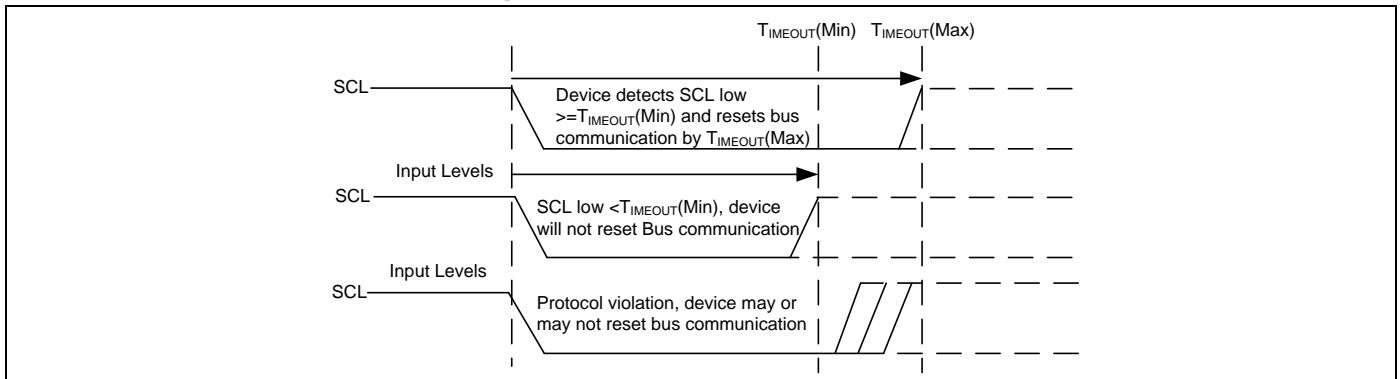



GT30TS00

6. Temperature Sensor

6.1 TS Register Overview

The GT30TS00 Temperature Register Set is accessed through the I²C Bus address 0011_bbb_ R/ \bar{w} . The “bbb” denotes the Logical Serial Address code LSA. The Temperature Register Set stores the temperature data, limits, and configuration values. All registers in the address space from 0x00 through 0x08 are 16-bit registers, accessed through block read and write commands.

Behavior on accesses to invalid register locations is vendor-specific and may return an Ack or a NoAck.

6.2 TS Write Operation

Writing to the GT30TS00 Temperature Register Set is accomplished through a modified block write operation for two (2) data bytes. To maintain I²C Bus compatibility, the 16 bit register is accessed through a pointer register, requiring the write sequence to include an address pointer in addition to the Slave address. This indicates the storage location for the next two bytes received.

Figure 6.1 shows an entire write transaction on the bus.

6.3 TS Read Operation

Reading data from the TS may be accomplished in one of two ways:

1. If the location latched in the Pointer Register is correct (for normal operation it is expected the same address will be read repeatedly for temperature), the read sequence may consist of a Slave Address from the bus master followed by two bytes of data from the device; or

2. The pointer register is loaded with the correct register address, and the data is read. The sequence to preset the pointer register is shown in Figure 6.3, and the preset pointer read is shown in Figure 6.4. If it is desired to read random address each cycle, the complete Pointer Write, Word Read sequence is shown in Figure 6.5.

The data byte has the most significant bit first. At the end of a read, this device can accept either Acknowledge (Ack) or No Acknowledge (NoAck) from the Master (No Acknowledge is typically used as a signal for the slave that the Master has read its last byte).

6.4 TS Register Set Definition

The register set address are shown in Table 6.1. These values are used in the I²C Bus operations as the “REG_PTR” in Figures 6.1 to Figure 6.4.

Table 6.1 TS Register Summary

| Address | R/ \bar{w} | Name | Function | Default |
|---------|--------------|---------------------|--|-----------|
| N/A | W | Address Pointer | Address storage for subsequent operations | Undefined |
| 00h | R | Capabilities | Indicates the functions and capabilities of the temperature sensor | N/A |
| 01h | R/ \bar{w} | Configuration | Controls the operation of the temperature monitor | 0000 |
| 02h | R/ \bar{w} | High Limit | Temperature High Limit | 0000 |
| 03h | R/ \bar{w} | Low Limit | Temperature Low Limit | 0000 |
| 04h | R/ \bar{w} | TCRIT Limit | Critical Temperature | 0000 |
| 05h | R | Ambient Temperature | Current Ambient Temperature | N/A |
| 06h | R | Manufacturer ID | PCI-SIG manufacturer ID | 1C68 |
| 07h | R | Device/Revision | Device ID and Revision number | 2201 |
| 08-0F | R/ \bar{w} | Vendor-defined | Vendor Specific information | N/A |



GT30TS00

6.5 TS Capability Register

The TS Capabilities Register indicates the supported features of the temperature sensor portion of the GT30TS00. This register is read-only and writing to it will have no effect.

Bit15 - Bit8 -- RFU - Reserved for future use. These bits will always read '0'

Bit7 - EVSD -- **EVENT** with Shutdown action. Must be 1.
'0' - Not used.

'1' - The **EVENT** output is deasserted (not driven) when entering shutdown, and remains deasserted upon exit from shutdown until the next thermal sample is taken, or possibly sooner if **EVENT** is programmed for comparator mode. In interrupt mode, **EVENT** may or may not be asserted when exiting shutdown if a pending interrupt has not been cleared.

Bit6 - TMOUT -- Bus timeout period during normal operation. Must be 1.

'0' - Not used.

'1' - Parameter T_{TIMEOUT} is supported within the range of 25 to 50 ms.

Bit5 -- RFU - Reserved for future use. Must be is '0'.

Bit4 - Bit3 -- TRES[1:0] - Indicates the resolution of the temperature monitor as shown in Table 6.3.

Bit2 - RANGE -- Indicates the supported temperature range.

'0' - Not used.

'1' - The temperature monitor can read temperatures below 0 °C and sets the sign bit appropriately.

Bit1 - ACC -- Indicates the supported temperature accuracy.

'0' - Not used.

'1' - The temperature monitor has ±1 °C accuracy over the active range (75 °C to 95 °C) and 2°C accuracy over the monitoring range (40 °C to 125 °C)

Bit0 - EVENT -- Indicates whether the temperature monitor supports interrupt capabilities

'0' - Not used.

'1' - The device supports interrupt capabilities.

Table 6.2 TS Capability Register

| ADDR | R/ \bar{W} | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 |
|------|--------------|--------|--------|--------|-----------|--------|--------|-------|-------|
| 00 | R | RFU | RFU | RFU | RFU | RFU | RFU | RFU | RFU |
| | | EVSD | TMOUT | RFU | TRES[1:0] | | RANGE | ACC | EVENT |

Table 6.3 TRES Bit Decode

| TRES[1:0] | | Temperature Resolution |
|-----------|---|------------------------|
| 1 | 0 | 0.5°C (9-bit) |
| 0 | 0 | |
| 0 | 1 | 0.25°C (10-bit) |
| 1 | 0 | 0.125°C (11-bit) |
| 1 | 1 | 0.0625°C (12-bit) |



GT30TS00

6.6 TS Configuration Register

The TS Configuration Register holds the control and status bits of the $\overline{\text{EVENT}}$ pin as well as general hysteresis on all limits.

Bits15 - 11 -- RFU - Reserved for future use. These bits will always read '0' and writing to them will have no effect. For future compatibility, all RFU bits must be programmed as '0'.

Bits10 - 9 -- HYST[1:0] - Control the hysteresis that is applied to all limits as shown in Table 6.5. This hysteresis applies to all limits when the temperature is dropping below the threshold so that once the temperature is above a given threshold, it must drop below the threshold minus the hysteresis in order to be flagged as an interrupt event. Note that hysteresis is also applied to $\overline{\text{EVENT}}$ pin functionality. When either of the lock bits is set, these bits cannot be altered.

Bit8 - SHDN -- Shutdown. The thermal sensing device and A/D converter are disabled to save power, no events will be generated. When either of the lock bits is set, this bit cannot be set until unlocked. However it can be cleared at any time. When in shutdown mode, GT30TS00 still respond to commands normally, however bus timeout may or may not be supported in this mode.

'0' (default) - The thermal sensor is active and converting.

'1' - The thermal sensor is disabled and will not generate interrupts or update the temperature data.

Bit7 - TCRIT_LOCK -- Locks the TCRIT Limit Register from being updated.

'0' (default) - The TCRIT Limit Register can be updated normally.

'1' - The TCRIT Limit Register is locked and cannot be updated. Once this bit has been set, it cannot be cleared until an internal power on reset.

Bit6 - EVENT_LOCK -- Locks the High and Low Limit Registers from being updated.

'0' (default) - The High and Low Limit Registers can be updated normally.

'1' - The High and Low Limit Registers are locked and cannot be updated. Once this bit has been set, it cannot be

cleared until an internal power on reset.

Bit5 - CLEAR -- Clears the $\overline{\text{EVENT}}$ pin when it has been asserted. This bit is write only and will always read '0'.

'0' - does nothing

'1' - The $\overline{\text{EVENT}}$ pin is released and will not be asserted until a new interrupt condition occurs. This bit is ignored if the device is operating in Comparator Mode. This bit is self clearing.

Bit4 - EVENT_STS -- Indicates if the $\overline{\text{EVENT}}$ pin is asserted. This bit is read only.

'0' (default) - The $\overline{\text{EVENT}}$ pin is not being asserted by the device.

'1' - The $\overline{\text{EVENT}}$ pin is being asserted by the device.

Bit3 - EVENT_CTRL -- Masks the $\overline{\text{EVENT}}$ pin from generating an interrupt. If either of the lock bits are set (bit 7 and bit 6), then this bit cannot be altered.

'0' (default) - The $\overline{\text{EVENT}}$ pin is disabled and will not generate interrupts.

'1' - The $\overline{\text{EVENT}}$ pin is enabled.

Bit2 - TCRIT_ONLY -- Controls whether the $\overline{\text{EVENT}}$ pin will be asserted from a high / low out-of-limit condition. When the EVENT_LOCK bit is set, this bit cannot be altered.

'0' (default) - The $\overline{\text{EVENT}}$ pin will be asserted if the measured temperature is above the High Limit or below the Low Limit in addition to if the temperature is above the TCRIT Limit.

'1' - The $\overline{\text{EVENT}}$ pin will only be asserted if the measured temperature is above the TCRIT Limit.

Bit1 - EVENT_POL -- Controls the "active" state of the $\overline{\text{EVENT}}$ pin. The $\overline{\text{EVENT}}$ pin is driven to this state when it is asserted. If either of the lock bits are set (bit 7 and bit 6), then this bit cannot be altered.

'0' (default) - The $\overline{\text{EVENT}}$ pin is active low. The "active" state of the pin will be logical '0'.

'1' - The $\overline{\text{EVENT}}$ pin is active high. The "active" state of the pin will be logical '1'.

Bit0 - EVENT_MODE -- Controls the behavior of the $\overline{\text{EVENT}}$ pin. The $\overline{\text{EVENT}}$ pin may function in either comparator or interrupt mode. If either of the lock bits are



GT30TS00

set (bit 7 and bit 6), then this bit cannot be altered.

comparator mode

'0' (default) - The $\overline{\text{EVENT}}$ pin will function in

'1' - The $\overline{\text{EVENT}}$ pin will function in interrupt mode

Table 6.4 TS Configuration Register

| ADDR | R/W | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|-----|----------------|----------------|--------|---------------|----------------|----------------|---------------|----------------|---------|
| 01 | R/W | RFU | RFU | RFU | RFU | RFU | RFU | RFU | RFU | 0000 |
| | | TCRIT_L OCK | EVENT_L OCK | CLEAR | EVENT_ STS | EVENT_ CTRL | TCRIT_ ONLY | EVENT_ POL | EVENT_ MODE | |

Table 6.5 HYST Bit Decode

| HYST[1:0] | | HYSTERESIS |
|-----------|---|------------------------------|
| 1 | 0 | Disable Hysteresis (Default) |
| 0 | 0 | |
| 0 | 1 | 1.5°C |
| 1 | 0 | 3°C |
| 1 | 1 | 6°C |

6.7 TS Register Value Definitions

Temperatures in the High Limit Register, Low Limit Register, TCRIT Register, and Temperature Data Register are expressed in two's complement format. Bits B12 through B2 for each of these registers are defined for all device resolutions as defined in the TRES field of the Capabilities Register, hence a 0.25 °C minimum granularity is supported in all registers. Examples of valid settings and interpretation of temperature register bits:

The TRES field of the Capabilities Register optionally defines higher resolution devices. For compatibility and simplicity, this additional resolution affects only the

Temperature Data Register but none of the Limit Registers. When higher resolution devices generate status or $\overline{\text{EVENT}}$ changes, only bits B12 through B2 are used in the comparison; however, all 11 bits (TRES[1-0] = 10) or all 12 bits (TRES[1-0] = 11) are visible in reads from the Temperature Data Register.

When a lower resolution device is indicated in the Capabilities Register (TRES[1-0] = 00), the finest resolution supported is 0.5 °C. When this is detected, bit 2 of all Limit Registers should be programmed to 0 to assure correct operation of the temperature comparators.

Table 6.6 Temperature Register Coding Examples

| B15-B0 (Binary) | Value | Units |
|---------------------|-------|-------|
| XXX0 0000 0010 11xx | +2.75 | °C |
| XXX0 0000 0001 00xx | +1.00 | °C |
| XXX0 0000 0000 01xx | +0.25 | °C |
| XXX0 0000 0000 00xx | 0 | °C |
| XXX1 1111 1111 11xx | -0.25 | °C |
| XXX1 1111 1111 00xx | -1.00 | °C |
| XXX1 1111 1101 01xx | -2.75 | °C |



GT30TS00

6.8 TS High Limit Register

The temperature limit registers (High, Low, and TCRIT) define the temperatures to be used by various on chip comparators to determine device temperature status and thermal EVENTS. For future compatibility, unused bits “-” must be programmed as 0.

The High Limit Register holds the High Limit for the nominal

operating window. When the temperature rises above the High Limit, or drops below or equal to the High Limit, then the $\overline{\text{EVENT}}$ pin is asserted (if enabled). If the EVENT_LOCK bit is set in the Configuration Register see Table 6.4), then this register becomes read-only.

Table 6.7 High Limit Register

| ADDR | R/W | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|--------------------------|--------|--------|--------|--------|--------|--------|-------|-------|---------|
| 02 | R/ $\overline{\text{W}}$ | - | - | - | Sign | 128 | 64 | 32 | 16 | |
| | | 8 | 4 | 2 | 1 | 0.5 | 0.25 | - | - | |

6.9 TS Low Limit Register

The Low Limit Register holds the lower limit for the nominal operating window. When the temperature drops below the Low Limit or rises up to meet or exceed the Low Limit, then

the $\overline{\text{EVENT}}$ pin is asserted (if enabled). If the EVENT_LOCK bit is set in the Configuration Register see Table 6.4), then this register becomes read-only.

Table 6.8 Low Limit Register

| ADDR | R/W | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|--------------------------|--------|--------|--------|--------|--------|--------|-------|-------|---------|
| 03 | R/ $\overline{\text{W}}$ | - | - | - | Sign | 128 | 64 | 32 | 16 | |
| | | 8 | 4 | 2 | 1 | 0.5 | 0.25 | - | - | |

6.10 TCRIT Limit Register

The TCRIT Limit Register holds the TCRIT Limit. If the temperature exceeds the limit, the $\overline{\text{EVENT}}$ pin will be asserted. It will remain asserted until the temperature drops

below or equal to the limit minus hysteresis. If the TCRIT_LOCK bit is set in the Configuration Register (see Table 6.4), then this register becomes read-only.

Table 6.9 TCRIT Limit Register

| ADDR | R/W | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|--------------------------|--------|--------|--------|--------|--------|--------|-------|-------|---------|
| 04 | R/ $\overline{\text{W}}$ | - | - | - | Sign | 128 | 64 | 32 | 16 | |
| | | 8 | 4 | 2 | 1 | 0.5 | 0.25 | - | - | |

6.11 Temperature Data Register

The Temperature Data Register holds the 10-bit + sign data for the internal temperature measurement as well as the status bits indicating which error conditions, if any, are active. The encoding of bits B12 through B0 is the same as for the temperature limit registers.

Bit15 - TCRIT -- When set, the temperature is above the

TCRIT Limit. This bit will remain set so long as the temperature is above TCRIT and will automatically clear once the temperature has dropped below the limit minus the hysteresis.

Bit14 - HIGH -- When set, the temperature is above the High Limit. This bit will remain set so long as the



GT30TS00

temperature is above the HIGH limit. Once set, it will only be cleared when the temperature drops below or equal to the HIGH Limit minus the hysteresis.

Bit13 - LOW -- When set, the temperature is below the Low

Limit. This bit will remain set so long as the temperature is below the Low Limit minus the hysteresis. Once set, it will only be cleared when the temperature meets or exceeds the Low Limit

Table 6.10 Temperature Data Register

| ADDR | R/ \bar{W} | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|--------------|--------|--------|--------|--------|--------|--------|-------|-------|-----------|
| 05 | R/ \bar{W} | TCRIT | HIGH | LOW | Sign | 128 | 64 | 32 | 16 | N/A(0000) |
| | | 8 | 4 | 2 | 1 | 0.5 | 0.25* | - | - | |

Note: * Resolution defined based on value of TRES field of the Capabilities Register. Unused/unsupported bits will read as 0.

6.12 Manufacture ID Register

The Manufacturer ID Register holds the PCI SIG number

assigned to the specific manufacturer.

Table 6.11 TSE Manufacture ID Register

| ADDR | R/ \bar{W} | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|--------------|--------|--------|--------|--------|--------|--------|-------|-------|---------|
| 06 | R/ \bar{W} | 0 | 0 | 0 | 1 | 1 | 1 | 0 | 0 | 1C68 |
| | | 0 | 1 | 0 | 0 | 1 | 0 | 0 | 0 | |

6.13 Device ID / Revision Register

The upper byte of the Device ID / Revision Register must be 0x22 for the GT30TS00. The lower byte holds the revision

value which is vendor-specific.

Table 6.12 TSE Device ID/Revision Register

| ADDR | R/ \bar{W} | B15/B7 | B14/B6 | B13/B5 | B12/B4 | B11/B3 | B10/B2 | B9/B1 | B8/B0 | Default |
|------|--------------|--------|--------|--------|--------|--------|--------|-------|-------|---------|
| 07 | R/ \bar{W} | 0 | 0 | 1 | 0 | 0 | 0 | 1 | 0 | 2201 |
| | | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | |



GT30TS00

Figure 6.1 TS Register Write Operation

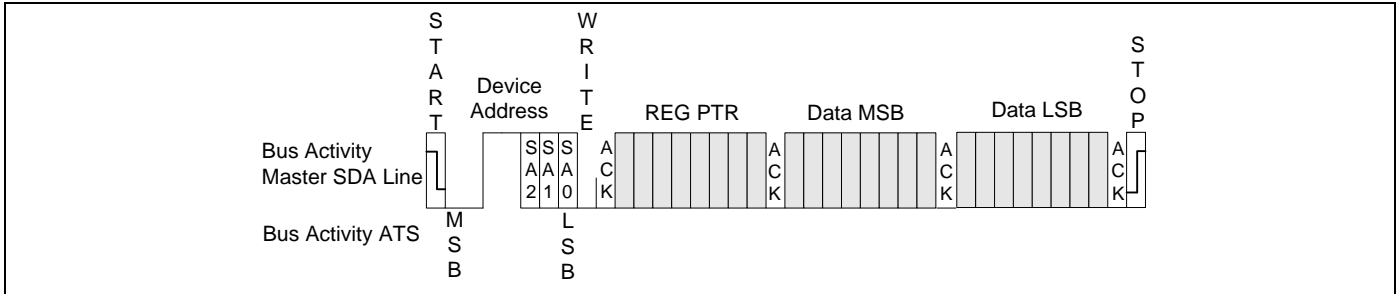


Figure 6.2 I²C Bus Write to Pointer Register

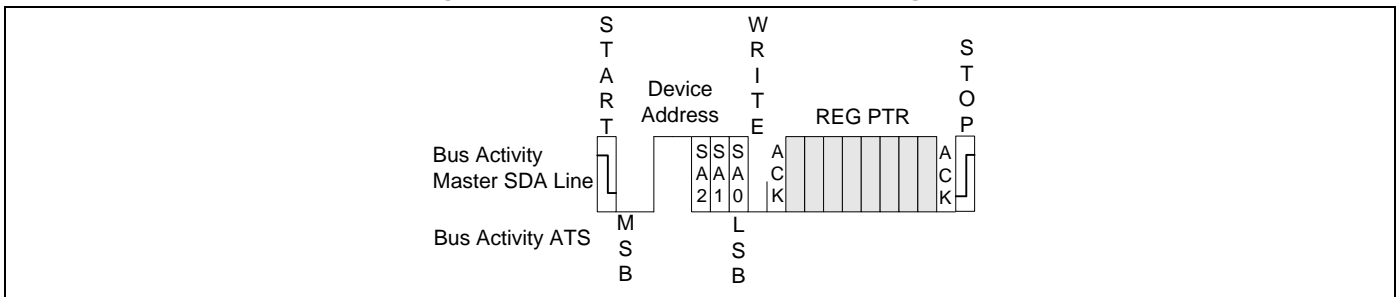


Figure 6.3 I²C Bus Preset Pointer Register Word Read


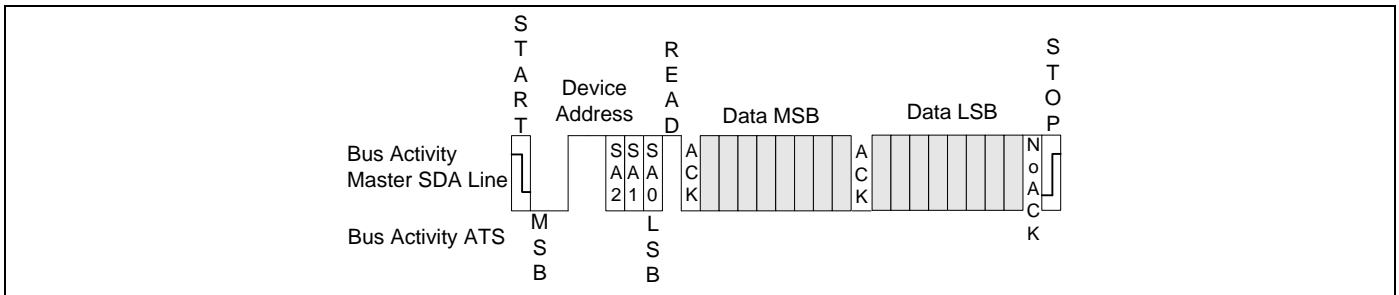



Figure 6.4 I²C Bus Pointer Write Register Word Read



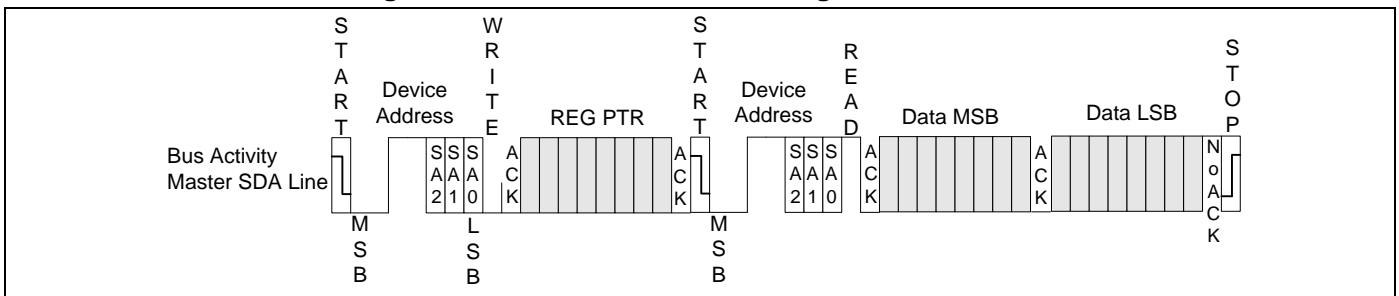

GT30TS00

Figure 6.5 EVENT Pin Mode Functionality

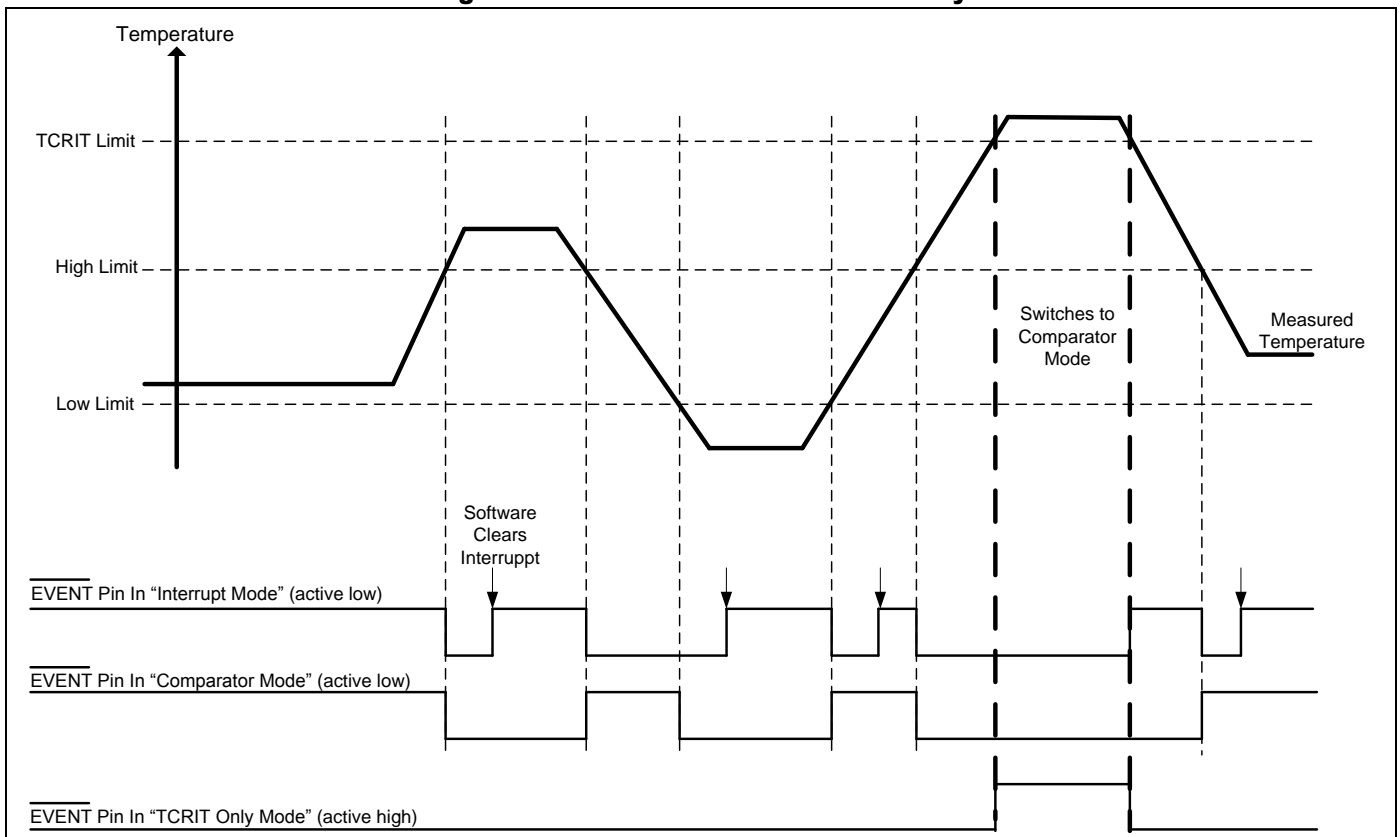



GT30TS00

7. Electrical Characteristics

7.1 Absolute Maximum Ratings

| Symbol | Parameter | Value | Unit |
|--------------|--|---------------|------|
| V_{CC} | Supply Voltage | -0.5 to + 4.3 | V |
| V_N | Voltage on SDA, SCL and $\overline{\text{EVENT}}$ Pins | -0.5 to + 4.3 | V |
| V_{SA0} | Voltage on pin SA0 | -0.5 to +10 | V |
| $T_{J(max)}$ | Maximum Junction Temperature | 150 | °C |
| T_{stg} | Storage Temperature | -65 to +150 | °C |

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other condition outside those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

7.2 Operating Range

| Range | Ambient Temperature (T_A) | Vcc |
|------------|-------------------------------|--------------|
| Industrial | -20°C to +125°C | 2.2V to 3.6V |

Note: Giantec offers Industrial grade for Commercial applications (0°C to +70°C).

7.3 Capacitance

| Symbol | Parameter ^[1, 2] | Conditions | Min. | Max. | Unit |
|-----------|--|---------------------------------------|------|------|------------|
| C_{IN} | Input Capacitance | -- | -- | 6 | pF |
| $C_{I/O}$ | Input / Output Capacitance | -- | -- | 8 | pF |
| Z_{EIL} | Ei (SA0, SA1, SA2) input impedance | $V_{IN} < 0.3 * V_{CC}$ | 30 | -- | K Ω |
| Z_{EIH} | Ei (SA0, SA1, SA2) input impedance | $V_{IN} > 0.7 * V_{CC}$ | 800 | -- | K Ω |
| T_{SP} | Pulse width of spikes which must be suppressed by the input filter | Single glitch, $f \leq 100\text{KHz}$ | -- | -- | ns |
| | | Single glitch, $f \geq 100\text{KHz}$ | 0 | 50 | |

Notes: ^[1] Tested initially and after any design or process changes that may affect these parameters and not 100% tested.

^[2] Test conditions: $T_A = 25^\circ\text{C}$, $f = 400\text{ KHz}$, $V_{CC} = 2.2\text{V to }3.6\text{V}$, unless otherwise specified.

7.4 AC Measurement Conditions

| Symbol | Parameter | Min | Max | Units |
|--------|--|--------------------------------|-----|-------|
| C_L | Load capacitance | 100 | | pF |
| | Input rise and fall times | -- | 50 | ns |
| | Input levels | 0.2* V_{CC} to 0.8* V_{CC} | | V |
| | Input and output timing reference levels | 0.3* V_{CC} to 0.7* V_{CC} | | V |



GT30TS00

7.5 DC Electrical Characteristic

$V_{CC} = 2.2V$ to $3.6V$, $T_{amb} = -20\text{ }^{\circ}C$ to $+125\text{ }^{\circ}C$, unless otherwise specified

| Symbol | Parameter ^[1] | Conditions | $f \leq 400KHz$ | | $F \geq 400KHz$ | | Unit |
|------------|---|--|-----------------|----------------|-----------------|----------------|---------|
| | | | Min. | Max. | Min. | Max. | |
| I_{LI} | Input Leakage current(SCL, SDA) | $V_{IN}=V_{CC}$ or GND | -- | ± 5 | -- | ± 5 | μA |
| I_{LO} | Output leakage current | $V_{OUT}=V_{CC}$ or GND, SDA in Hi-Z | -- | ± 5 | -- | ± 5 | μA |
| I_{CC} | Supply current | $V_{CC}=3.V$, $f_c=100KHz$ (rise/fall time<30ns) | -- | 2 | -- | 2 | mA |
| I_{SB1} | Standby supply current | $V_{IN}=V_{CC}$ or GND, $V_{CC}=3.6V$ | -- | 100 | -- | 100 | μA |
| V_{IH} | Input High Voltage | SCL, SDA | $0.7 * V_{CC}$ | $V_{CC}+0.5$ | $0.7 * V_{CC}$ | $V_{CC}+0.5$ | V |
| V_{IL} | Input Low Voltage | SCL, SDA | -0.5 | $0.3 * V_{CC}$ | -0.5 | $0.3 * V_{CC}$ | V |
| V_{OL1} | Output Low Voltage ^[2] open-drain or open-collector | $I_{OL}=3mA$, $V_{CC}>2.2V$ | -- | 0.4 | -- | 0.4 | V |
| V_{OL2} | | $I_{OL}=2mA$, $V_{CC}\leq 2.2V$ | -- | 0.2 | -- | 0.2 | |
| I_{OL} | Output Low Sink Current ^[3] | $V_{OL}=0.4V$ | 3 | | 20 | | mA |
| | | $V_{OL}=0.6V$ | 6 | | -- | | mA |
| V_{HYST} | Input hysteresis | $V_{CC}<2V$ | $0.10 * V_{CC}$ | -- | $0.10 * V_{CC}$ | -- | V |
| | | $V_{CC}\geq 2V$ | $0.05 * V_{CC}$ | -- | $0.05 * V_{CC}$ | -- | V |
| V_{PON} | Power On Reset threshold | Monotonic rise between V_{PON} and $V_{CC}(\min)$ without ringback | 1.6 | -- | 1.6 | -- | V |
| V_{POFF} | Power Off threshold for warm power on cycle | No ringback above V_{POFF} | -- | 0.9 | -- | 0.9 | V |

Notes: ^[1] The parameters are characterized but not 100% tested.

^[2] The same resistor value to drive 3mA at 3.0V, V_{CC} provides the same RC time constant when using <2V, V_{CC} with a smaller current draw

^[3] In order to drive full bus load at 400KHz, 6mA IOL is required at 0.6V VOL. Parts not meeting this specification can still function, but not at 400KHz and 400pF.



GT30TS00

7.6 AC Electrical Characteristic

V_{CC} = 2.2V to 3.6V, T_{amb} = 25°C, unless otherwise specified

| Symbol | Parameter | 100KHz ^[3] | | 400KHz | | 1000KHz | | Unit |
|-----------------------------------|---|-----------------------|------|--------|------|---------|------|------|
| | | Min. | Max. | Min. | Max. | Min. | Max. | |
| F _{SCL} | SCL clock frequency | 10 | 100 | 10 | 400 | 10 | 1000 | kHz |
| T _{LOW} ^[2] | Low period of SCL clock | 4700 | | 1300 | | 500 | | ns |
| T _{HIGH} | High period of SCL clock | 4000 | | 600 | | 260 | | ns |
| T _{BUF} | Bus free time between a Stop and a Start conditions | 4700 | | 1300 | | 500 | | ns |
| T _{SU;STA} | Start condition Setup time | 4700 | | 600 | | 260 | | ns |
| T _{HD;STA} | Start condition Hold time | 4000 | | 600 | | 260 | | ns |
| T _{SU;STO} | Stop condition Setup time | 4000 | | 600 | | 260 | | ns |
| T _{SU;DAT} | Data In Setup time | 250 | | 100 | | 50 | | ns |
| T _{HD;DI} ^[1] | Data In Hold time | 0 | | 0 | | 0 | | ns |
| T _{HD;DAT} | Data Out Hold Time | 200 | 3450 | 200 | 900 | 0 | 350 | ns |
| T _R ^[1] | Rise time of SDA | -- | 1000 | 20 | 300 | -- | 120 | ns |
| T _F ^[1] | Fall time of SDA | -- | 300 | 20 | 300 | -- | 120 | ns |
| T _{INIT} | Time from power on to first command | 10 | | 10 | | 10 | | ns |
| T _{POFF} | Warm power cycle off time | 1 | | 1 | | 1 | | ms |
| T _{time-out} | Detect clock low timeout | 25 | 50 | 25 | 50 | 25 | 50 | ms |

Notes:^[1] Guaranteed by design and characterization, not necessarily tested.

^[2] I²C bus masters can terminate a transaction in process and reset device communication on the bus by asserting SCL low for

T_{TIMEOUT,MAX} or longer. This devices that have detected this condition must reset their communication and be able to receive a new START condition no later than T_{TIMEOUT,MAX}. This device will not reset if SCL stretching is less than T_{TIMEOUT,MIN}. See Bus Timeout Waveforms.


^[3] 100 KHz timing compliant with SMBus 2.0 specifications.

^[4] Not all parameters are 100% tested .

7.7 Temperature to Digital Conversion Performance

| Symbol | Parameter ^[1] | Min. | Typ. | Max. | Unit |
|-------------------------------|--|-------------------------------------|------|------|--------|
| T _{S_{Acc}} | Temperature sensor (TS) accuracy (B-grade) | T _{amb} = 70 °C to 95 °C | ±0.5 | ±1.0 | °C |
| | | T _{amb} = 40 °C to 125 °C | ±1.0 | ±2.0 | °C |
| | | T _{amb} = -20 °C to 125 °C | ±2.0 | ±3.0 | °C |
| T _{S_{Res}} | TS Resolution | 10-bit ADC | | 0.25 | °C/LSB |
| R _{ADC} | ADC Resolution | | | 10 | Bits |
| T _{S_{Conv}} | Conversion Rate | | | 125 | ms |

Figure 7.1 AC Measurement I/O Waveform

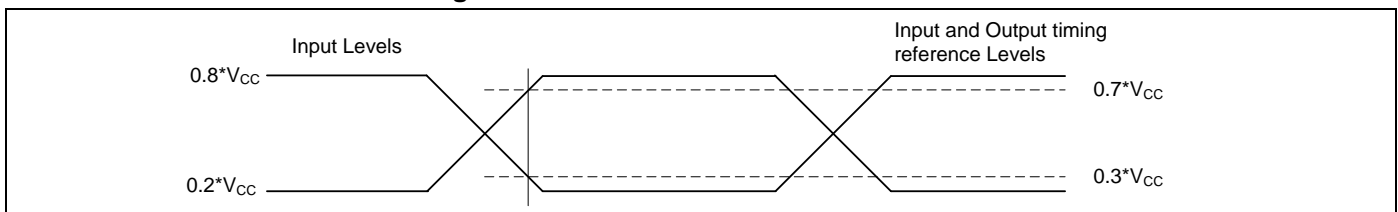



GT30TS00

8. Ordering Information

Temperature Grade: -20°C to +125°C, Lead-free

| Voltage Range | Part Number* | Package (8-pin)* |
|----------------------|---------------------|--------------------------------|
| 2.2V to 3.6V | GT30TS00-3GLI-TR | 150-mil SOIC/SOP |
| | GT30TS00-3ZLI-TR | 3 x 4.4 mm TSSOP |
| | GT30TS00-3UDLI-TR | 2 x 3 x 0.55 mm Ultra-thin DFN |

*

1. Contact Giantec Sales Representatives for availability and other package information.
2. The listed part numbers are packed in tape and reel "-TR". UDFN is 5K per reel.
3. Refer to Giantec website for related declaration document on lead free, RoHS, halogen free or Green, whichever is applicable.




GT30TS00

9. Package Information

9.1 SOIC/SOP

8L 150mil SOP Package Outline

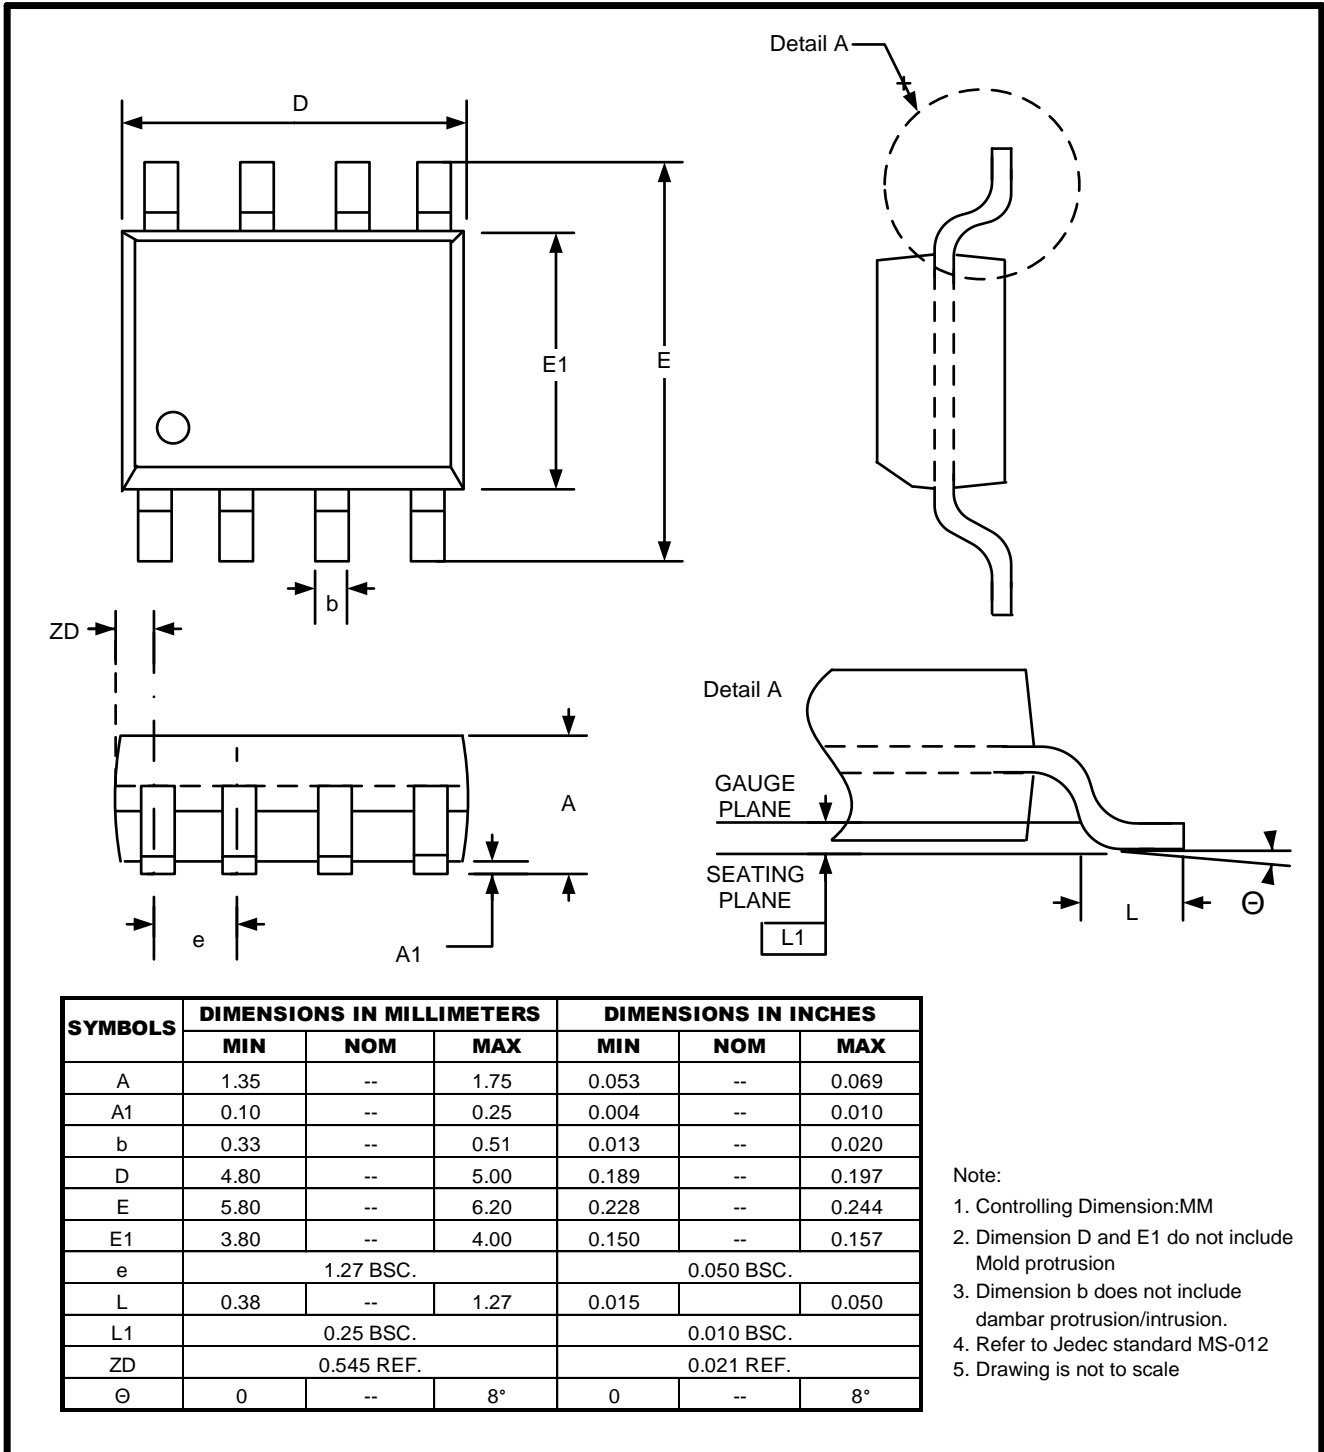




GT30TS00

9.2 TSSOP

8L 3x4.4mm TSSOP Package Outline

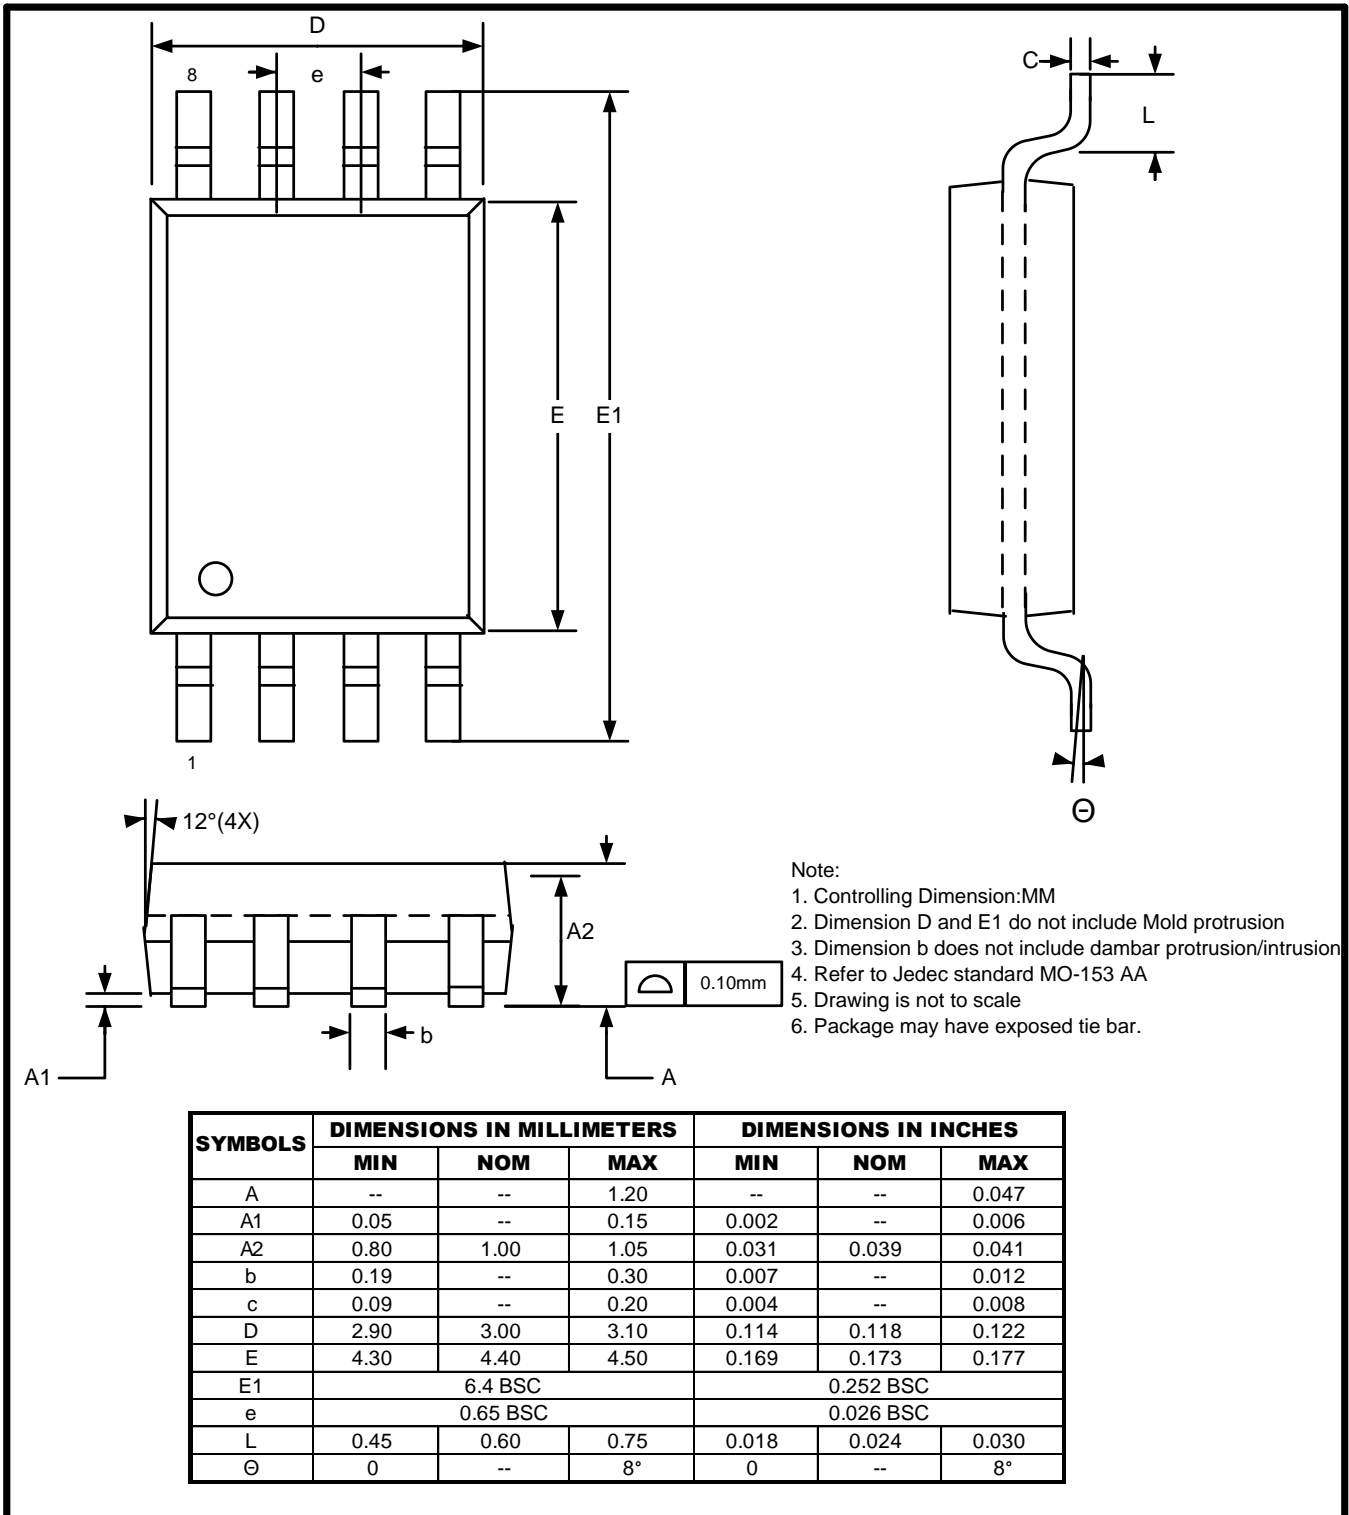




GT30TS00

9.3 UDFN

8L 2x3mm UDFN Package Outline

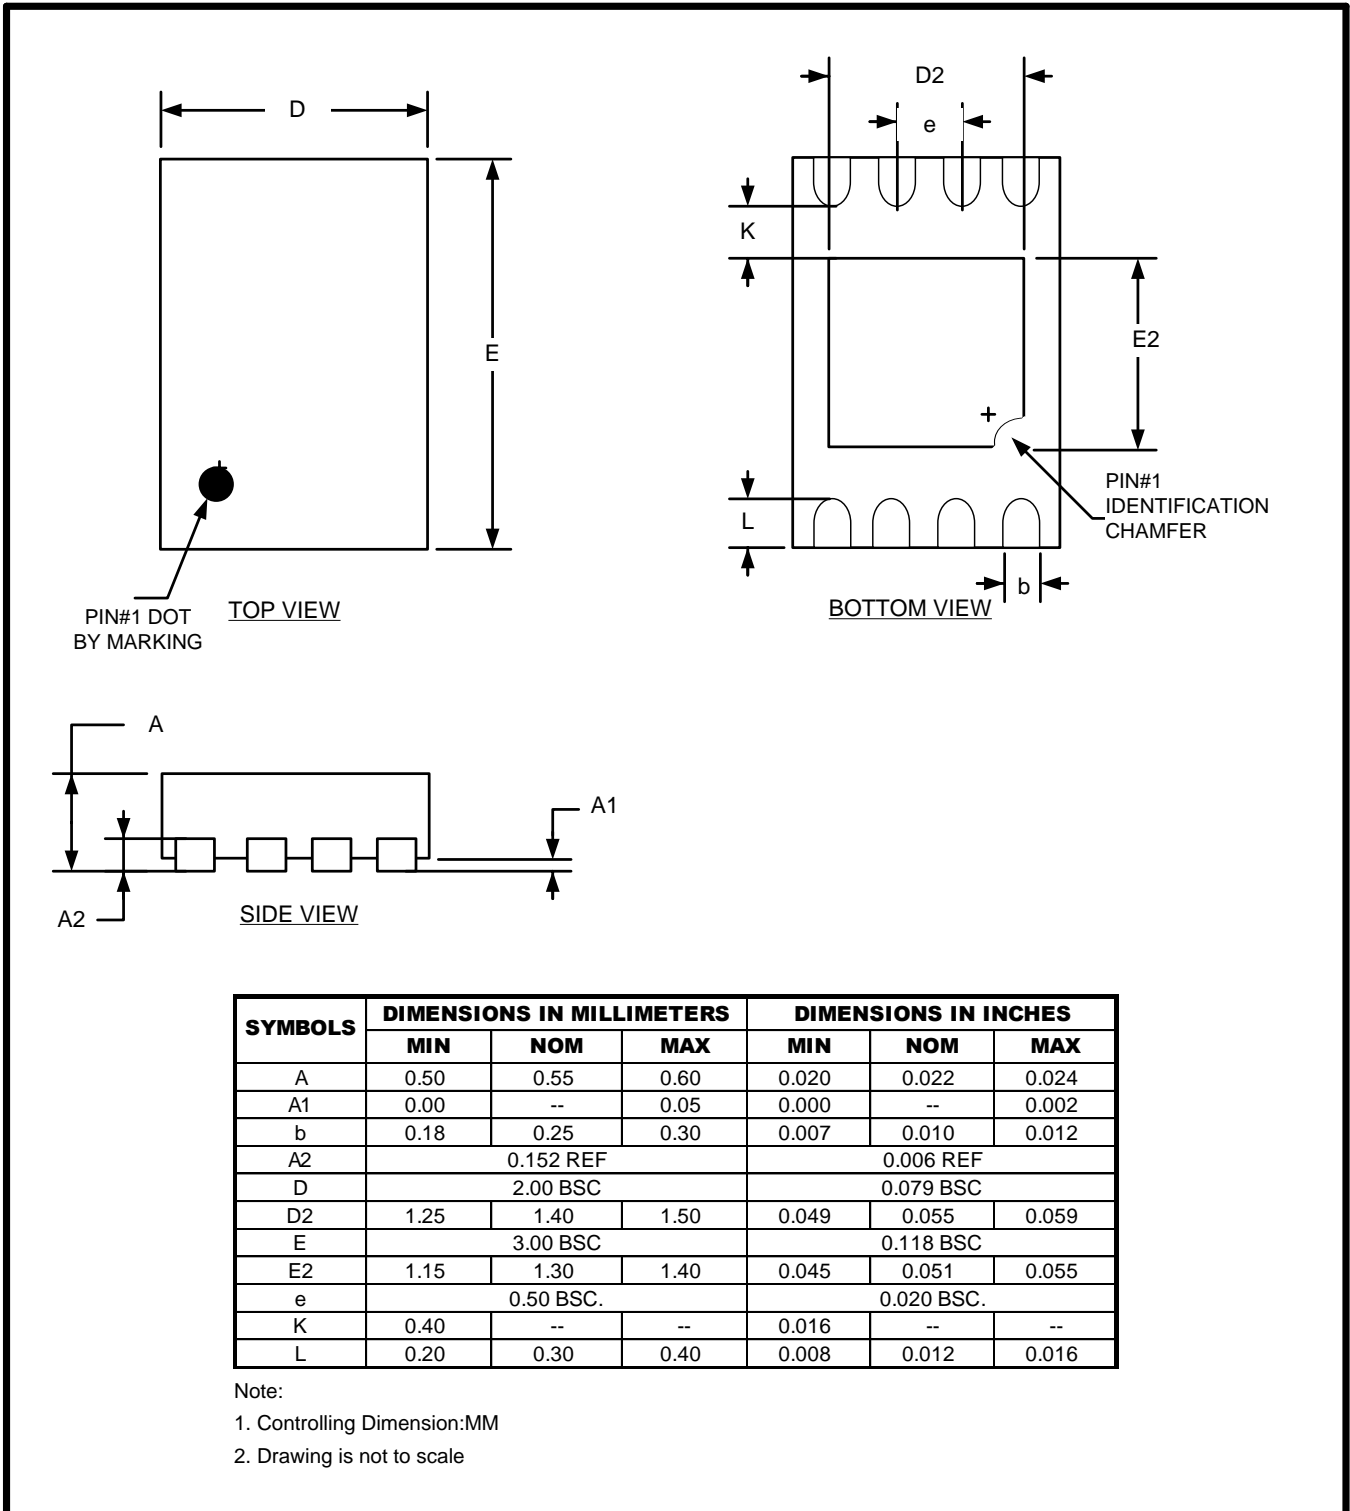



GT30TS00

10. Revision History

| Revision | Date | Descriptions |
|-----------------|-------------|---------------------|
| A0 | Aug. 2013 | Initial version |